

Small Lithium Titanate Rechargeable Battery

SLB03070LR35

nichicon

◆SPECIFICATIONS

Operating temperature range	-30°C ~ +60°C
Nominal voltage	2.4V
Maximum charge voltage	2.8V
Discharge end voltage	1.8V
Nominal Capacity	0.35mAh
Rated Capacity	0.35mAh
Max charge/discharge current	7mA (20C)
Rated Energy content	0.84mWh
E.S.R. (at 1kHz, 2.4V)	8 ohm
Weight	0.12g


•UL1642

•IEC62133-2:2017 certified

◆FEATURES

- Capable of operating in high-temperature environments at 60°C
- Support for 20C rate rapid charge/discharge
- Capable of charging at low rate (0.01C)
- Excellent cycle characteristics (5,000cycle_@25°C)
- Possible to use in cold regions (-30°C)
- Extremely low possibility of rupture or ignition


◆DIMENSIONS (example)

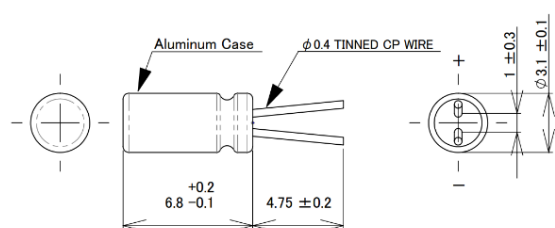


Unit : mm

◆TYPICAL CHARACTERISTICS


Charge characteristics

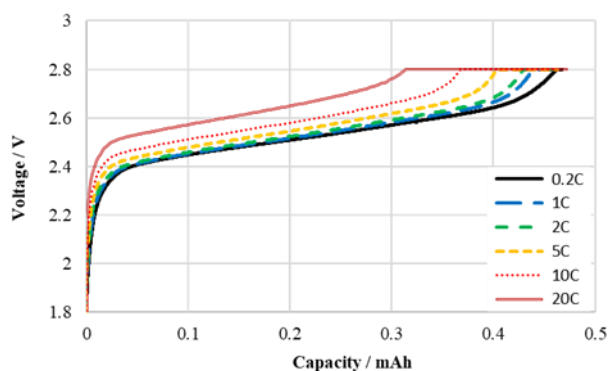

Discharge characteristics

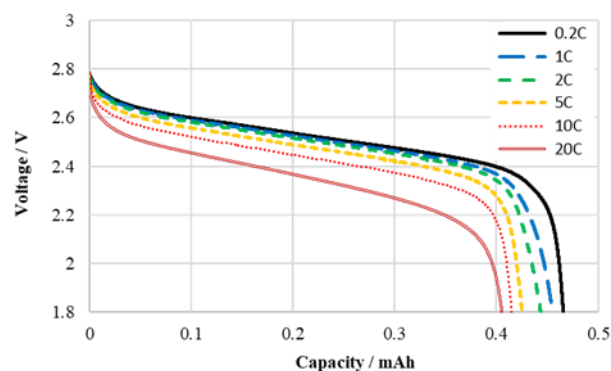

◆SOC-OCV Curve

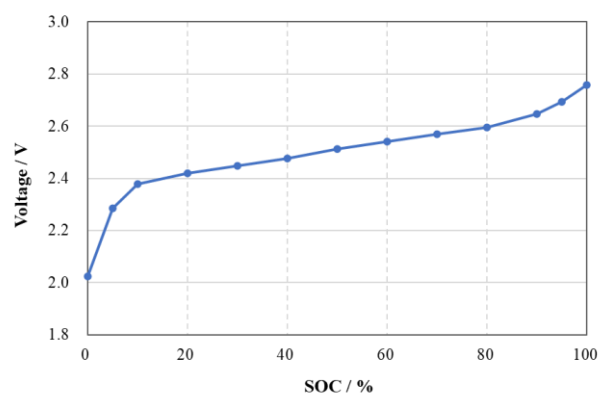

The data in this document is for descriptive purposes only and is not intended to make or imply any guarantee or warranty. Design, specifications are subject to change without notice.

NICHICON CORPORATION