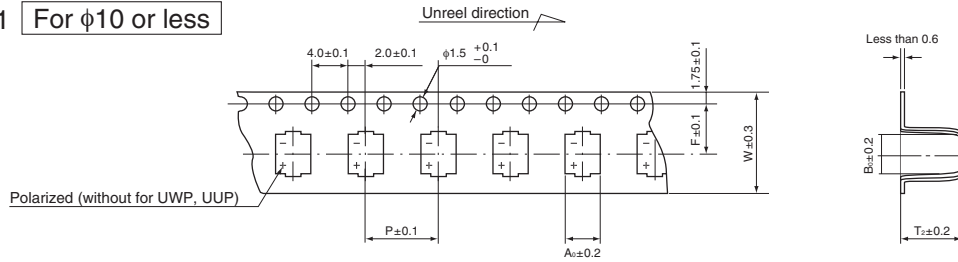
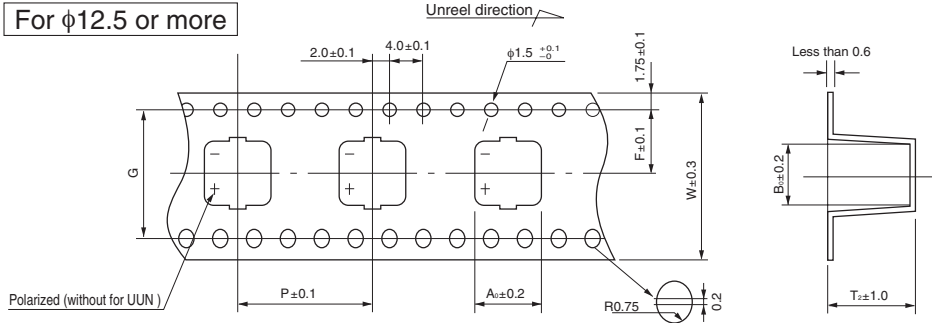


■ Taping Specifications for Chip Type Capacitors

※ Please refer to FPCAP Taping Specifications for Chip Type about the FPCAP product spec.


● Carrier tape

(mm)

Fig.1 For $\phi 10$ or lessFig.2 For $\phi 12.5$ or more

Size	Item							fig.	Type - Series
	W	P	F	A ₀	B ₀	T ₂	G		
$\phi 5 \times 6$ L	12.0	12.0	5.5	5.7	5.7	6.3	—	1	PCF, PCJ, PCK, PCG, PCS, PCL, PCW, PCV, PCX, PCR, PCA, PCM, PCH, PCZ (Conductive Polymer Aluminum Solid Electrolytic Capacitors)
$\phi 6.3 \times 5.5$ L	16.0	12.0	7.5	7.0	7.0	5.7			
$\phi 6.3 \times 6$ L	16.0	12.0	7.5	7.0	7.0	6.3			
$\phi 6.3 \times 8$ L	16.0	12.0	7.5	7.0	7.0	8.2			
$\phi 8 \times 7$ L	24.0	12.0	11.5	8.7	8.7	7.3			
$\phi 8 \times 8$ L	24.0	12.0	11.5	8.7	8.7	8.3			
$\phi 8 \times 10$ L	24.0	16.0	11.5	8.7	8.7	11.0			
$\phi 8 \times 10.5$ L	24.0	16.0	11.5	8.7	8.7	11.0			
$\phi 8 \times 12$ L	24.0	16.0	11.5	8.7	8.7	12.3			
$\phi 10 \times 8$ L	24.0	16.0	11.5	10.7	10.7	8.3			
$\phi 10 \times 10$ L	24.0	16.0	11.5	10.7	10.7	11.0			
$\phi 10 \times 10.5$ L	24.0	16.0	11.5	10.7	10.7	11.0			
$\phi 10 \times 12.7$ L	24.0	16.0	11.5	10.7	10.7	12.8	—	1	GYA, GYB, GYC, GYD, GYE, GYF, GXC (Conductive Polymer Hybrid Aluminum Electrolytic Capacitors)
$\phi 10 \times 13.2$ L	24.0	16.0	11.5	10.7	10.7	13.5			
$\phi 6.3 \times 5.8$ L	16.0	12.0	7.5	7.0	7.0	6.3			
$\phi 6.3 \times 7.7$ L	16.0	12.0	7.5	7.0	7.0	8.0			
$\phi 8 \times 10$ L	24.0	16.0	11.5	8.7	8.7	11.0	—	1	UZG
$\phi 10 \times 10$ L	24.0	16.0	11.5	10.7	10.7	11.0			
$\phi 10 \times 12.5$ L	24.0	16.0	11.5	10.7	10.7	14.1	—	1	UZT, UCQ
$\phi 10 \times 16.5$ L	24.0	16.0	11.5	10.7	10.7	17.7			
$\phi 4 \times 3.9$ L	12.0	8.0	5.5	4.7	4.7	4.3	—	1	UWP, UWT, UWZ, UWG, UUU
$\phi 5 \times 3.9$ L	12.0	12.0	5.5	5.7	5.7	4.3			
$\phi 6.3 \times 3.9$ L	16.0	12.0	7.5	7.0	7.0	4.4	—	1	UWT, UWZ, UUP, UCD, UCL, UCM, UUD, UWD, UCZ, UUA, UUL, UCQ
$\phi 4 \times 4.5$ L	12.0	8.0	5.5	4.7	4.7	4.9			
$\phi 5 \times 4.5$ L	12.0	12.0	5.5	5.7	5.7	4.9	—	1	UWT, UWZ, UUP, UCD, UCL, UCM, UUD, UWD, UCZ, UUA, UUL, UCQ
$\phi 6.3 \times 4.5$ L	16.0	12.0	7.5	7.0	7.0	5.0			
$\phi 4 \times 5.4$ L	12.0	8.0	5.5	4.7	4.7	5.8	—	1	UWT, UWZ, UUP, UCD, UCL, UCM, UUD, UWD, UCZ, UUA, UUL, UCQ
$\phi 5 \times 5.4$ L	12.0	12.0	5.5	5.7	5.7	5.8			
$\phi 6.3 \times 5.4$ L	16.0	12.0	7.5	7.0	7.0	5.8	—	1	UWT, UWZ, UUP, UCD, UCL, UCM, UUD, UWD, UCZ, UUA, UUL, UCQ
$\phi 4 \times 5.8$ L	12.0	8.0	5.5	4.7	4.7	6.3			
$\phi 5 \times 5.8$ L	12.0	12.0	5.5	5.7	5.7	6.3	—	1	UWT, UWZ, UUP, UCD, UCL, UCM, UUD, UWD, UCZ, UUA, UUL, UCQ
$\phi 6.3 \times 5.8$ L	16.0	12.0	7.5	7.0	7.0	6.3			
$\phi 5 \times 7$ L	16.0	12.0	7.5	5.7	5.7	7.5	—	1	UWT, UWZ, UWG, UUA, UUL, UCW, UCD, UCL, UCM, UCV, UUD, UWD, UUB, UWH, ULT, ULH, UCJ, UCZ, UYA, UCH, UCX, UUX, ULR, ULV, UUU, UCQ, UUE, UBC, UBH
$\phi 6.3 \times 7$ L	16.0	12.0	7.5	7.0	7.0	7.5			
$\phi 6.3 \times 7.7$ L	16.0	12.0	7.5	7.0	7.0	8.0			
$\phi 6.3 \times 8.7$ L	16.0	12.0	7.5	7.0	7.0	9.1			
$\phi 6.3 \times 10$ L	16.0	12.0	7.5	7.0	7.0	11.4			
$\phi 8 \times 6.2$ L	16.0	12.0	7.5	8.7	8.7	6.8			
$\phi 8 \times 10$ L	24.0	16.0	11.5	8.7	8.7	11.0			
$\phi 10 \times 7.7$ L	24.0	16.0	11.5	10.7	10.7	8.4			
$\phi 10 \times 10$ L	24.0	16.0	11.5	10.7	10.7	11.0			
$\phi 10 \times 13.5$ L	24.0	16.0	11.5	10.7	10.7	14.1			
$\phi 12.5 \times 13.5$ L	32.0	24.0	14.2	14.0	14.0	14.0	28.4	2	UCD, UCM, UCK, UCZ, UCX, UUG, UUU, UUN, UUE, UBC
$\phi 12.5 \times 16$ L	32.0	24.0	14.2	14.0	14.0	16.3			
$\phi 12.5 \times 21$ L	32.0	24.0	14.2	14.0	14.0	21.3			
$\phi 16 \times 16.5$ L	44.0	28.0	20.2	17.5	17.5	16.8			
$\phi 16 \times 21.5$ L	44.0	28.0	20.2	17.5	17.5	21.8			
$\phi 18 \times 16.5$ L	44.0	32.0	20.2	19.5	19.5	16.8			
$\phi 18 \times 21.5$ L	44.0	32.0	20.2	19.5	19.5	21.8			
$\phi 18 \times 21.5$ L	44.0	32.0	20.2	19.5	19.5	21.8	40.4		

● Reel ※ Please refer to FPCAP Taping Specifications for Chip Type about the FPCAP product spec. (mm)

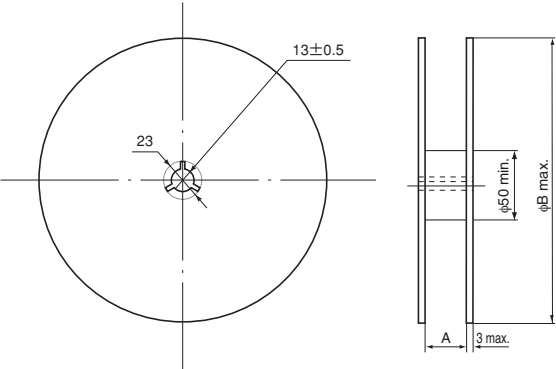

Package quantity

$\phi D, \phi D \times L$	Q'ty / reel
4	2,000pcs.
5, 6.3	1,000pcs.
6.3 $\times$ 7.7, 6.3 $\times$ 8, 8 $\times$ 8	900pcs.
6.3 $\times$ 8.7	800pcs.
6.3 $\times$ 10	600pcs.
8 $\times$ 6.2, 8 $\times$ 7	1,000pcs.
8 $\times$ 10, 8 $\times$ 10.5, 10 $\times$ 7.7, 10 $\times$ 8, 10 $\times$ 10, 10 $\times$ 10.5	500pcs.
8 $\times$ 12, 10 $\times$ 12.5, 10 $\times$ 12.7, 10 $\times$ 13.2, 10 $\times$ 13.5	400pcs.
10 $\times$ 16.5	300pcs.
12.5 $\times$ 13.5	200pcs.
12.5 $\times$ 16	150pcs.
12.5 $\times$ 21, 16 $\times$ 16.5, 18 $\times$ 16.5	125pcs.
16 $\times$ 21.5, 18 $\times$ 21.5	75pcs.

Conductive Polymer Aluminum Solid Electrolytic Capacitors

ϕD	5	6.3	8	10
A	14	18		26
B			382	

Conductive Polymer Hybrid Aluminum Electrolytic Capacitors

ϕD	6.3	8	10
A	18		26
B			382

Aluminum Electrolytic Capacitors

ϕD	4	5 $\times$ 3, 5 $\times$ 3.9, 5 $\times$ 4.5, 5 $\times$ 5.4, 5 $\times$ 5.8	5 $\times$ 7	6.3	8 $\times$ 5.4, 8 $\times$ 6.2	8 $\times$ 7, 8 $\times$ 10, 10 $\times$ 7.7, 10 $\times$ 8, 10 $\times$ 10, 10 $\times$ 13.5	12.5	16, 18
A	14	14	18	18	18	26	34	46
B	382	382	382	382	382	382	332	332

Optional tray packaging for chip type ($\phi 12.5$ to $\phi 18$) available upon request, please ask for details.