

Small Lithium Titanate Rechargeable Battery

SLB12400L151

nichicon

◆SPECIFICATIONS

Operating temperature range	-30°C ~ +60°C
Nominal voltage	2.4V
Maximum charge voltage	2.8V
Discharge end voltage	1.8V
Nominal Capacity	150mAh
Rated Capacity	142mAh
Max charge/discharge current	3,000mA (20C)
Rated Energy content	341mWh
E.S.R. (at 1kHz, 2.4V)	0.03 ohm
Weight	9.0g


•UL1642

•IEC62133-2:2017 certified

◆FEATURES


- Capable of operating in high-temperature environments at 60°C
- Support for 20C rate rapid charge/discharge
- Capable of charging at low rate (0.01C)
- Excellent cycle characteristics (20,000cycle_@25°C)
- Possible to use in cold regions (-30°C)
- Extremely low possibility of rupture or ignition

◆DIMENSIONS (example)

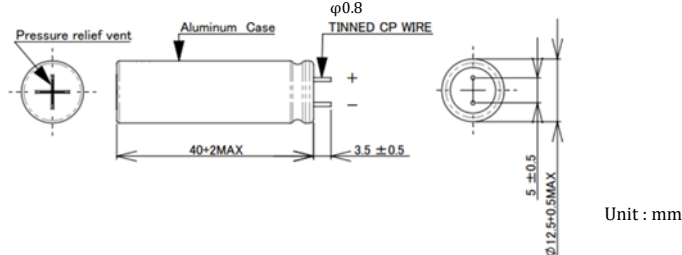


◆TYPICAL CHARACTERISTICS

Charge characteristics

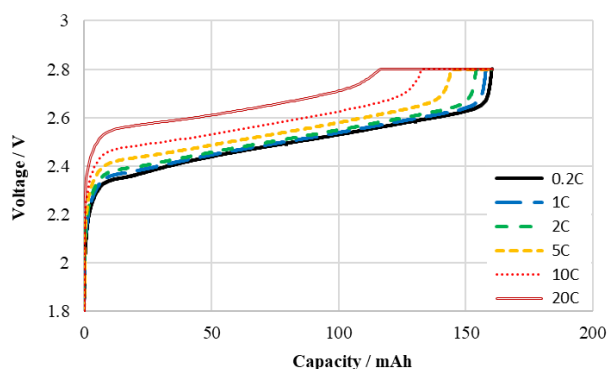

Discharge characteristics

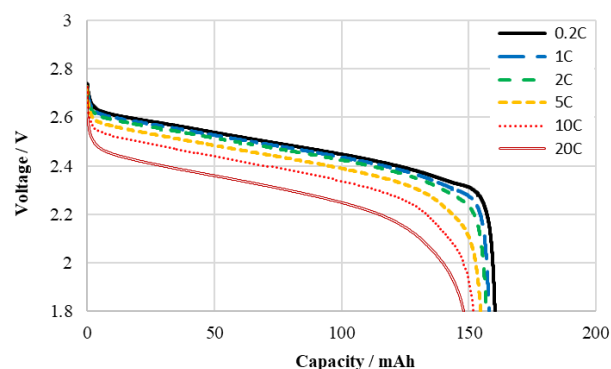

The data in this document is for descriptive purposes only and is not intended to make or imply any guarantee or warranty. Design, specifications are subject to change without notice.

NICHICON CORPORATION



◆SOC-OCV Curve

